


WHEN SAFETY COMES FIRST
SPRAYDRENCH[®]
 EMERGENCY SAFETY SHOWERS

MO 044 SH

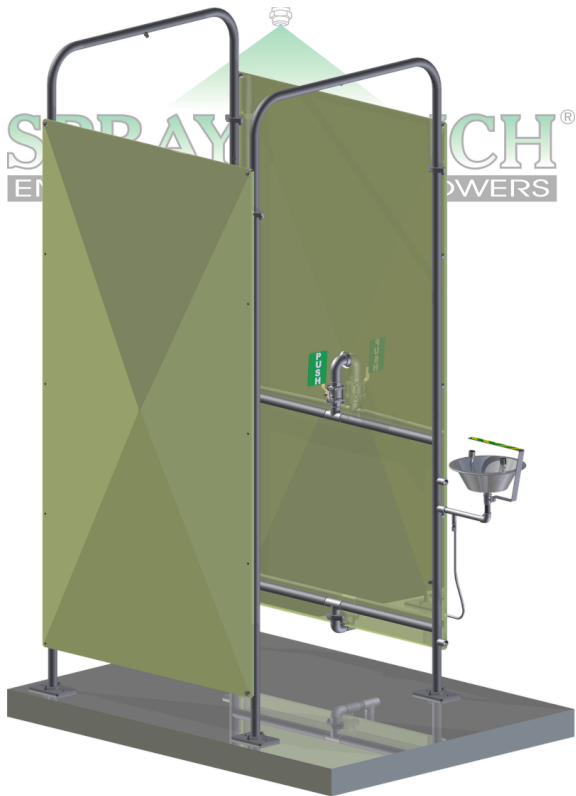

Detailed Description

Manually Operated Four Column
 Decontamination Unit c/w Hand/Push
 Operated Rigid Emergency Eyewash Station
 c/w Twin Aerator Nozzle with Dust Caps

Optional Extras

- Scald /or Freeze Protection Valve
- PVC Strip Curtain
- Additional Options Available on Request

Best Suited Applications

- Very high risk areas
- Hazardous substances load/offloading
- Decontamination
- Chemical and toxic material processing
- Hazardous substances mixing areas
- Chemical plants

Inlet : 1 BSP(F)

Primary Shower Nozzles (22 off SD14DN)

181 lpm

Eyewash: Twin Aerator Nozzles

20 lpm

Flow Rates at design pressure of ±2.5 bar(g)

Manually Operated

Four Column Free Standing

Stainless Steel

Hand Operated Eye Wash

MO 044 S H

Additional Info.

Material of Construction Stainless Steel

Approx. Floor Foot Print (cm) ±160 (L) x120 (W) x235 (H)

Single Unit Weight (kg) ±90

Typ. Single Unit Pack Dim. (cm) ±240 (L) x130 (W) x75 (H)

All **SPRAYDRENCH**[®] products are manufactured
 according to the following standards:

ANSI Z358.1-2014
 DIN 12899-3:2008

EN15154-1:2006-12
 EN15154-2:2006-12
 EN15154-5:2019-12

Further Detail Available on Request

TEL: +27 (0)11 466 2100 | FAX: +27 (0)11 466 0618

spray nozzle (PTY) LTD

sales@spraynozzle.co.za

PO BOX 2369, HALFWAY HOUSE, SOUTH AFRICA, 1685 | REG:1971/014137
 WWW.SPRAYDRENCH.CO.ZA | WWW.SPRAYNOZZLE.CO.ZA

SPRAYDRENCH[®]
 EMERGENCY SAFETY SHOWERS